

**FORD RAPTOR  
WITH FACTORY FENDER FLARES  
REAR MUD GUARD INSTALLATION INSTRUCTIONS**

*Please read instructions thoroughly before installation.*

**Tools Required**

- Socket / Driver


**Package Contents**

- Driver & Passenger Side Rear Mud Guard
- Instruction Sheet

**NOTE:** It may be necessary to remove the wheels depending on the tools being used for installation.

**Determine which mudguard you have by locating the part number molded in the mounting flange (5949 LH 5949 RH).**

1. Clean and degrease the mud guard location area on the fender before installation.
2. Remove existing fastener from location A and B.
3. Peel red protective covers from the 3M adhesive on the mudguard.
4. Attach mud guard to the fender using existing fasteners at location A and B, check fit and make sure mud guard is parallel to ground and press firmly on the area with the 3M adhesive tape to make sure adhesive is set.

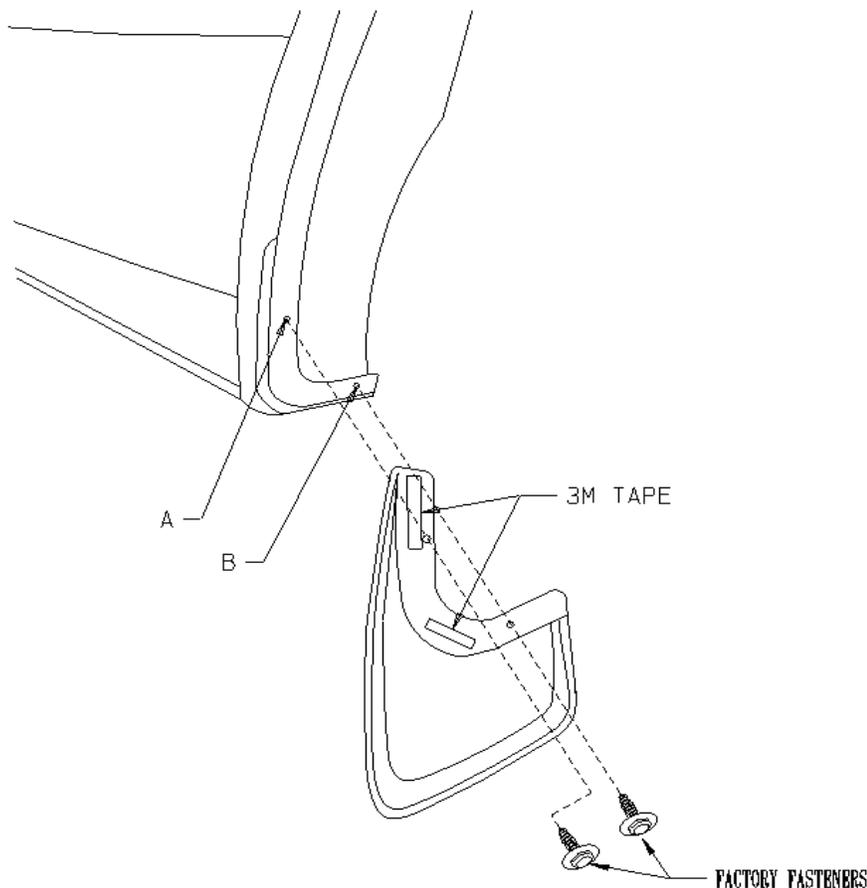

View the Husky Liners® Lifetime Warranty at [www.huskyliners.com/lifetime-warranty](http://www.huskyliners.com/lifetime-warranty).  
Patent and Trademark can be found at [www.hl-ip.com](http://www.hl-ip.com)